



單位/unit: (mm)



| 型號<br>Model | SML-XL | SMT-XL | SMM-XL |
|-------------|--------|--------|--------|
| L           | 152    | 195.5  | 232    |
| A           | 32     | 32     | 32     |
| B           | 81     | 81     | 81     |
| D           | 39.8   | 39.8   | 39.8   |




| 型號<br>Model | SMV  | SMY  | SMY<br>-BASE | SMV<br>-BASE |
|-------------|------|------|--------------|--------------|
| 通道<br>Pass  | 2    | 3    | 3            | 2            |
| A           | 27   | 27   | 27           | 27           |
| B           | 39.5 | 39.5 | 39.5         | 39.5         |
| C           | 68.5 | 69   | 35           | 35           |

旋轉式多管路接頭

特點 / Features

- 使用時可旋轉調整方向，避免造成管子彎曲、糾纏。  
Prevents tube from becoming entangle.

YL-2

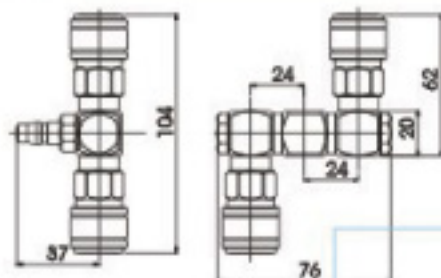

YL-3

